

Drypower

VRLA AGM CYCLIC RANGE
DEEP CYCLE POWER



12V

26Ah

SLA

CYCLIC
AGM

12SB26CLN

Rechargeable AGM Sealed Lead Acid Battery

SPECIFICATIONS

Nominal Voltage 12V

Nominal Capacity

20 hour rate	(1.30A to 10.50V)	26Ah
10 hour rate	(2.47A to 10.50V)	24.7Ah
5 hour rate	(4.42A to 10.20V)	22.1Ah
1C	(26A to 9.60V)	14.73Ah
3C	(78A to 9.60V)	10.4Ah

Weight Approx. 9.3kg

Internal Resistance (at 1KHz) Approx. 9.5mΩ

Maximum Discharge Current (5 secs) 390A

Charge Methods at 25°C

Cycle Use	
Charging Voltage	14.4V to 15.0V
Coefficient -5.0mV/°C/Cell	
Maximum Charging Current	7.8A
Standby Use	
Float Charging Voltage	13.5V to 13.8V
Coefficient -3.0mV/°C/Cell	

Operating Temperature Range

Charge	-15°C to 50°C*
Discharge	-15°C to 50°C
Storage	-15°C to 40°C

Charge Retention (Shelf Life) at 20°C

1 month	92%
3 months	90%
6 months	80%

Case Material ABS UL94 HB

Termination F6 (M5 Bolt)

Description of Torque Value of Hardware for the Terminals

Recommended Torque Value	M5: 5 N-m (51kgf-cm)
Max. Allowable Torque Value	M5: 6 N-m (61kgf-cm)

Design Life 3-5 years

Classified as a non-spillable battery.

Approved for transportation by:

- Air (IATA/ICAO provision A67)
- Road
- Sea (per IMDG Special Provision 238)



Barcode




9319632520307

* If charging above 40°C, always use temperature-compensated charging (refer charge methods above). High temperature use accelerates ageing; as a general guide, service life halves for every 10°C sustained rise above 25°C. Consult the engineers at MI for more information if required.




DIMENSIONS

mm (inch)

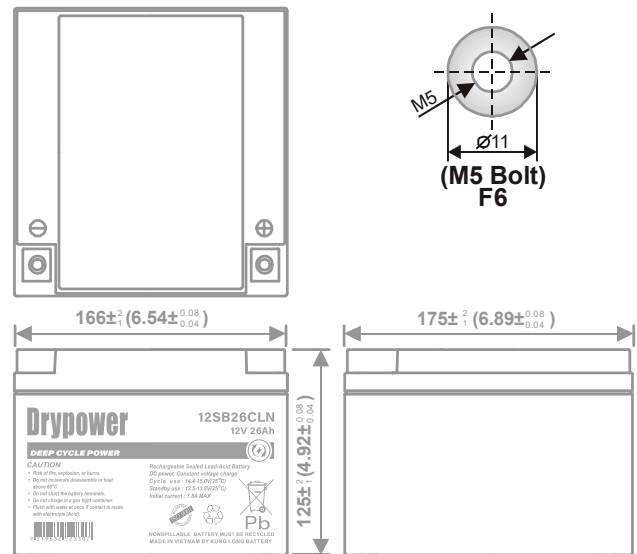


Discharge Time VS. Discharge Current (25°C)

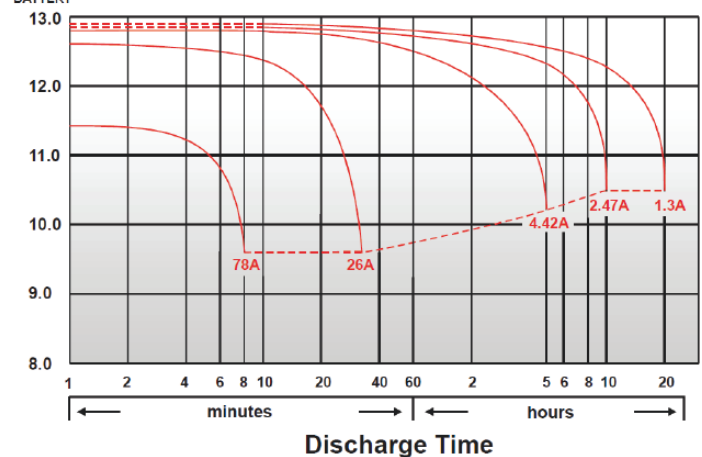


CHARACTERISTICS CHARTS


Effect of Temperature on Capacity 25°C (77°F)

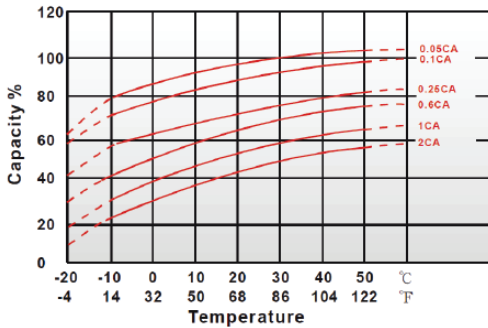


Capacity Retention Characteristic

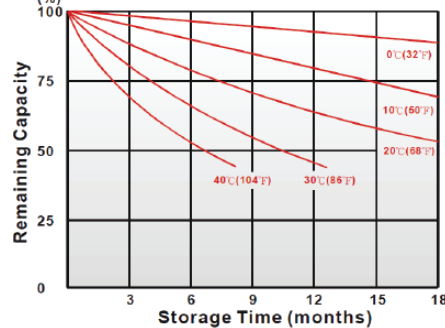

Cycle Service Life

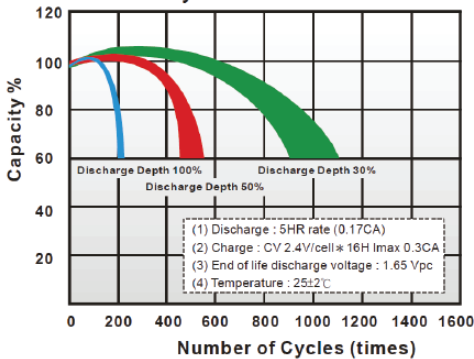

Trickle (or float) Service Life



FEATURES & BENEFITS

- ♦ Industry leading 99.99% pure lead content for superior service life and dependable performance.
- ♦ Special grid frame alloy design with outstanding anti-corrosion performance.
- ♦ Maintenance free technology and non-spillable design.
- ♦ Suitable for use in any orientation (except inverted) for use in hard to reach locations.
- ♦ Higher percentage of tin content compared with the industry standard. Tin extends battery standby life by minimising sulphation (corrosion) especially at higher temperatures.
- ♦ Manufactured by Kung Long Battery (KLB) at facilities in Taiwan and Vietnam. KLB is a leading manufacturer and complies with relevant international quality standards including ISO9001, CE ETL9000, UL1989, OHSAS18001 and ISO17025. KLB supports Green Sustainable supply chain practices.



PERFORMANCE DATA

Discharge Rates in Watts to Various End Voltages at 25°C (77°F)

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
Time								
5	min	147	161	173	185	191	196	208
10	min	108	114	119	125	128	131	135
15	min	78.7	84	88.2	92.2	94.2	96	99.5
30	min	42.3	45.3	47.2	48.7	49.5	50.3	51.3
60	min	30.2	31.7	32.4	32.8	33.2	33.5	33.8
120	min	19.2	19.8	20.2	20.7	20.8	21	21.2
180	min	12.8	13.2	13.4	13.6	13.6	13.7	13.8
240	min	10.3	10.5	10.7	10.8	10.9	10.9	11
300	min	8.75	8.9	8.98	9.07	9.10	9.15	9.37
600	min	5.42	5.52	5.58	5.66	5.68	5.72	5.75
1200	min	2.62	2.69	2.74	2.78	2.8	2.82	2.83

Discharge Rates in Amperes to Various End Voltages at 25°C (77°F)

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
Time								
5	min	78.9	92.9	103	109	111	113	115
10	min	55.6	62.1	64.2	68.2	70.4	72.3	75.7
15	min	40.8	46.4	49.8	52.6	54.3	54.9	56.2
30	min	21.4	23.8	25.2	26.5	27.2	27.8	28.8
60	min	15.3	16.1	16.5	16.9	17.1	17.3	17.5
120	min	9.34	9.72	9.87	10	10.1	10.2	10.3
180	min	6.45	6.63	6.72	6.83	6.87	6.92	6.99
240	min	5.48	5.61	5.69	5.76	5.79	5.84	5.91
300	min	4.77	4.86	4.93	5	5.02	5.05	5.08
600	min	2.55	2.61	2.65	2.69	2.71	2.74	2.77
1200	min	1.29	1.34	1.36	1.38	1.39	1.4	1.43

All data on the spec. sheet is an average value:

The tolerance range : $X < 6\text{min}$ (+15%~-15%), $6\text{min} \leq X < 10\text{min}$ (+12%~-12%), $10\text{min} \leq X < 60\text{min}$ (+8%~-8%), $X \geq 60\text{min}$ (+5%~-5%)

Aug2026

Performance may vary depending on application. All specifications are correct at time of creation. All specifications and operation conditions contained in this datasheet are subject to change or improvement without prior notice to the user. This data is for evaluation purposes only. No guarantee is intended or implied by this data. For clarification and updated information, please contact us.