



12V

30Ah

SLA

CYCLIC
AGM

12SB30C

Rechargeable AGM Sealed Lead Acid Battery

SPECIFICATIONS

Nominal Voltage 12V

Nominal Capacity

20 hour rate	(1.50A to 10.50V)	30Ah
10 hour rate	(2.85A to 10.50V)	28.5Ah
5 hour rate	(5.10A to 10.20V)	25.5Ah
1C	(30A to 9.60V)	17Ah
3C	(90A to 9.60V)	12Ah

Weight Approx. 9.3kg

Internal Resistance (at 1KHz) Approx. 9.5mΩ

Maximum Discharge Current (5 secs) 450A

Charge Methods at 25°C

Cycle Use	
Charging Voltage	14.4V to 15.0V
Coefficient -5.0mV/°C/Cell	
Maximum Charging Current	9A
Standby Use	
Float Charging Voltage	13.5V to 13.8V
Coefficient -3.0mV/°C/Cell	

Operating Temperature Range

Charge	-15°C to 50°C*
Discharge	-15°C to 50°C
Storage	-15°C to 40°C

Charge Retention (Shelf Life) at 20°C

1 month	92%
3 months	90%
6 months	80%

Case Material ABS UL94 HB

Termination F8 (M6 Bolt)

Description of Torque Value of Hardware for the Terminals

Recommended Torque Value	M6: 7 N-m (71kgf-cm)
Max. Allowable Torque Value	M6: 9 N-m (92kgf-cm)

Design Life 3-5 years

Classified as a non-spillable battery.

Approved for transportation by:

- Air (IATA/ICAO provision A67)
- Road
- Sea (per IMDG Special Provision 238)



Barcode




9319632520314

* If charging above 40°C, always use temperature-compensated charging (refer charge methods above). High temperature use accelerates ageing; as a general guide, service life halves for every 10°C sustained rise above 25°C. Consult the engineers at MI for more information if required.




DIMENSIONS

mm (inch)

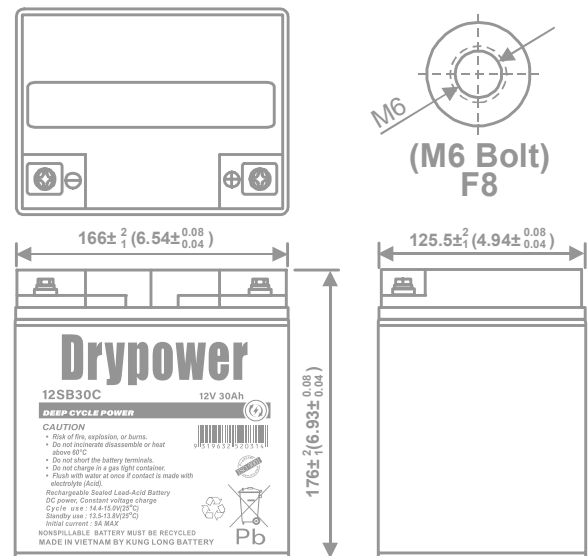


Discharge Time VS. Discharge Current (25°C)

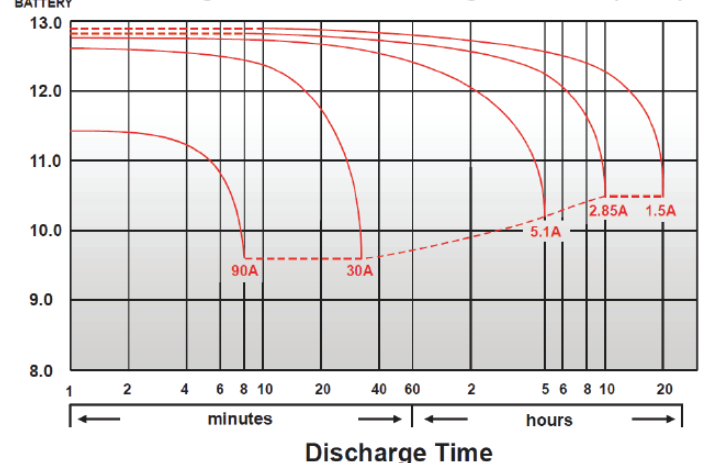


CHARACTERISTICS CHARTS


Effect of Temperature on Capacity 25°C (77°F)

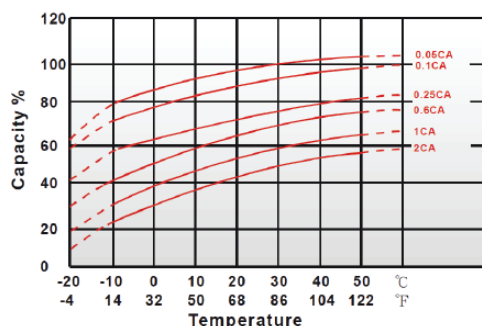


Capacity Retention Characteristic

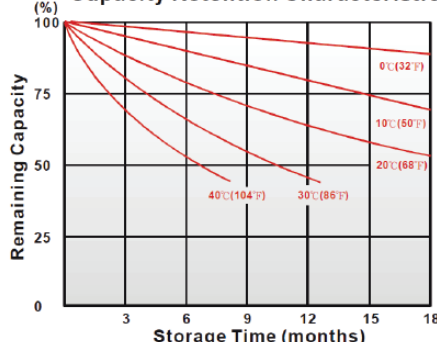

Cycle Service Life

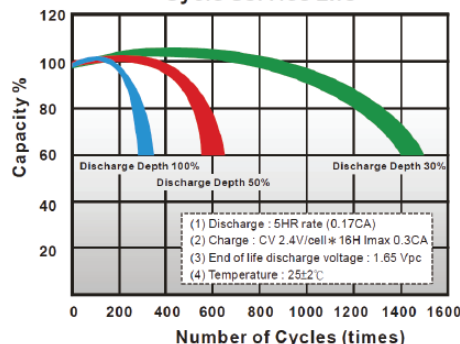

Trickle (or float) Service Life



FEATURES & BENEFITS

- ♦ Industry leading 99.99% pure lead content for superior service life and dependable performance.
- ♦ Special grid frame alloy design with outstanding anti-corrosion performance.
- ♦ Maintenance free technology and non-spillable design.
- ♦ Suitable for use in any orientation (except inverted) for use in hard to reach locations.
- ♦ Higher percentage of tin content compared with the industry standard. Tin extends battery standby life by minimising sulphation (corrosion) especially at higher temperatures.
- ♦ Manufactured by Kung Long Battery (KLB) at facilities in Taiwan and Vietnam. KLB is a leading manufacturer and complies with relevant international quality standards including ISO9001, CE ETL9000, UL1989, OHSAS18001 and ISO17025. KLB supports Green Sustainable supply chain practices.



PERFORMANCE DATA

Discharge Rates in Watts to Various End Voltages at 25°C (77°F)

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
Time								
5	min	145	167	183	188	195	201	210
10	min	111	120	128	132	136	139	144
15	min	90	96.7	105	107	109	111	113
30	min	56.7	59.9	61.8	62.7	63.3	64	64.5
60	min	36.5	37.3	38	38.3	38.7	39	39.3
120	min	21.8	22.3	23	23.2	23.3	23.5	23.7
180	min	16.2	16.5	16.7	16.8	17	17.2	17.3
240	min	12.4	12.7	13.1	13.2	13.3	13.4	13.6
300	min	10.4	10.6	10.7	10.8	11.00	11	11.1
600	min	5.92	6.08	6.22	6.23	6.25	6.27	6.28
1200	min	3.18	3.22	3.28	3.3	3.32	3.33	3.35

Discharge Rates in Amperes to Various End Voltages at 25°C (77°F)

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
Time								
5	min	74.5	89.8	105	108	112	115	121
10	min	59.5	72.5	68.3	71	73.5	76.3	79.2
15	min	46.5	50	54.3	55.7	57	58.3	59.8
30	min	29	30.5	31.9	32.6	33.1	33.5	34
60	min	17	17.8	18.6	19	19.4	19.6	19.8
120	min	11	11.5	11.9	12	12.1	12.2	12.3
180	min	7.7	7.85	8.1	8.21	8.3	8.37	8.46
240	min	6.15	6.22	6.36	6.4	6.45	6.51	6.58
300	min	5.1	5.18	5.3	5.38	5.42	5.46	5.51
600	min	2.91	2.97	3.06	3.07	3.08	3.09	3.1
1200	min	1.53	1.56	1.6	1.61	1.62	1.63	1.63

All data on the spec. sheet is an average value:

The tolerance range : X < 6min (+15%~-15%), 6min ≤ X < 10min (+12%~-12%), 10min ≤ X < 60min (+8%~-8%), X ≥ 60min (+5%~-5%)

Aug2026

Performance may vary depending on application. All specifications are correct at time of creation. All specifications and operation conditions contained in this datasheet are subject to change or improvement without prior notice to the user. This data is for evaluation purposes only. No guarantee is intended or implied by this data. For clarification and updated information, please contact us.