

Drypower

LONG LIFE RANGE
STANDBY LONG LIFE POWER



12V

36Ah

SLA

AGM

12SB36TL

Rechargeable AGM Sealed Lead Acid Battery

SPECIFICATIONS

Nominal Voltage 12V

Nominal Capacity

20 hour rate	(1.80A to 10.50V)	36Ah
10 hour rate	(3.42A to 10.50V)	34.2Ah
5 hour rate	(6.12A to 10.20V)	30.6Ah
1C	(36A to 9.60V)	22.8Ah
3C	(108A to 9.60V)	14.4Ah

Weight Approx. 11.0kg

Internal Resistance (at 1KHz) Approx. 8mΩ

Maximum Discharge Current (5 secs) 540A

Charge Methods at 25°C

Standby Use

Float Charging Voltage	13.5V to 13.8V
Coefficient -3.0mV/°C/Cell	
Maximum Charging Current	10.8A

Operating Temperature Range

Charge	-15°C to 50°C*
Discharge	-15°C to 50°C
Storage	-15°C to 40°C

Charge Retention (Shelf Life) at 20°C

1 month	92%
3 months	90%
6 months	80%

Case Material ABS UL94 HB

Termination F6 (M5 Bolt)

Description of Torque Value of Hardware for the Terminals

Recommended Torque Value	M5: 5 N-m (51kgf-cm)
Max. Allowable Torque Value	M5: 6 N-m (61kgf-cm)

Design Life

Expected Trickle Design Life

6-9 years at 20°C

Classified as a non-spillable battery.

Approved for transportation by:

- Air (IATA/ICAO provision A67)
- Road
- Sea (per IMDG Special Provision 238)

Barcode






9319632521298




DIMENSIONS

mm (inch)

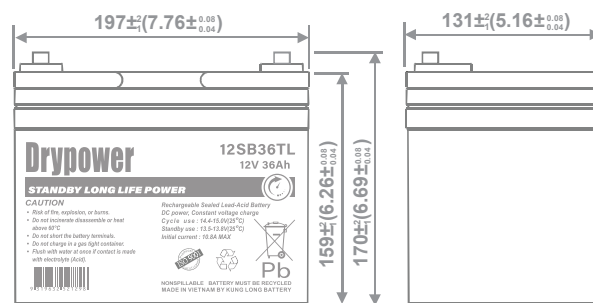


Discharge Time VS. Discharge Current (25°C)

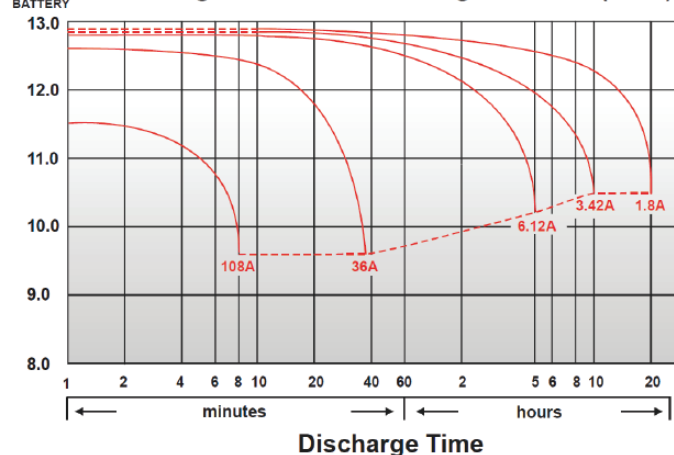


* If charging above 40°C, always use temperature-compensated charging (refer charge methods above). High temperature use accelerates ageing; as a general guide, service life halves for every 10°C sustained rise above 25°C. Consult the engineers at MI for more information if required.

CHARACTERISTICS CHARTS


Effect of Temperature on Capacity 25°C(77°F)

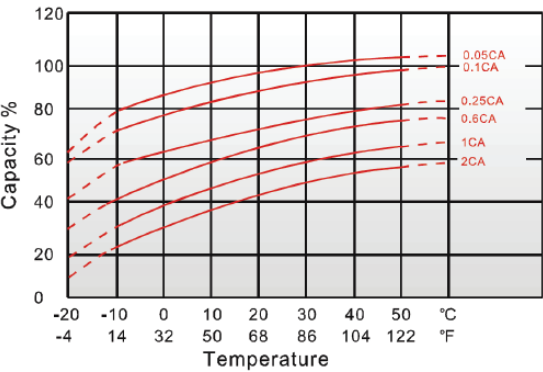

Trickle (or float) Service Life

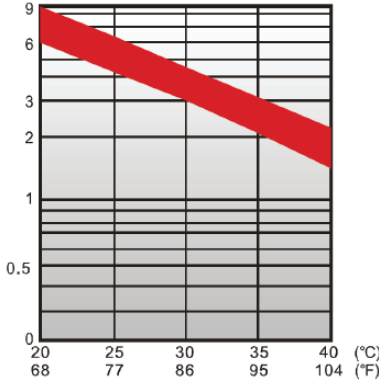

Capacity Retention Characteristic

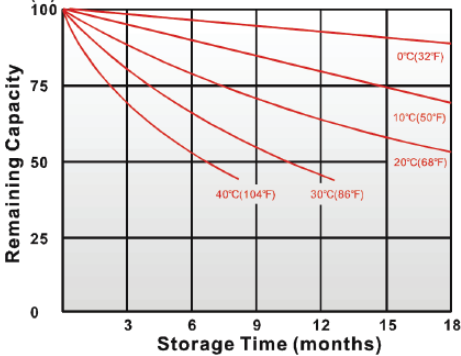

FEATURES & BENEFITS

- ◆ Industry leading 99.99% pure lead content for superior service life and dependable performance.
- ◆ Long service life to reduce maintenance and logistical costs across telecom, utilities and off-grid applications.
- ◆ Minimises sulphation with a thicker plate design and higher percentage of tin content to maximise battery standby life.
- ◆ High rate discharge capable to ensure reliable performance.
- ◆ Maintenance free technology and non-spillable design.
- ◆ Manufactured by Kung Long Battery (KLB) at facilities in Taiwan and Vietnam. KLB is a leading manufacturer and complies with relevant international quality standards including ISO9001, CE ETL9000, UL1989, OHSAS18001 and ISO17025. KLB supports Green Sustainable supply chain practices.

