



12V

100Ah

Lead
Carbon

AGM

12SLR100DC

Rechargeable Lead Carbon AGM Battery

SPECIFICATIONS

Nominal Voltage		12V
Nominal Capacity		
10 hour rate	(10A to 10.80V)	100Ah
5 hour rate	(17A to 10.20V)	85Ah
1 hour rate	(60A to 9.60V)	60Ah
1C	(100A to 9.60V)	63.3Ah
Weight		Approx. 31.2kg
Internal Resistance (at 1KHz)		Approx. 5mΩ
Maximum Discharge Current (5 secs)		600A
Charge Methods at 25°C		
Cyclic Use		
Charging Voltage		14.4V to 15.0V
Coefficient	-5.0mV/°C/Cell	
Maximum Charging Current		30A
Standby Use		
Float Charging Voltage		13.5V to 13.8V
Coefficient	-3.0mV/°C/Cell	
Operating Temperature Range		
Charge		-15°C to 40°C
Discharge		-15°C to 50°C
Storage		-15°C to 40°C
Charge Retention (Shelf Life) at 20°C		
1 month		98%
3 months		94%
6 months		85%

Case Material	ABS UL94 HB
Termination	F8 (M6 Bolt)

Description of Torque Value of Hardware for the Terminals

Recommended Torque Value	M6: 7 N·m (71kgf·cm)
Max. Allowable Torque Value	M6: 10 N·m (102kgf·cm)


Classified as a non-spillable battery.
Approved for transportation by:
 • Air (IATA/ICAO provision A67)
 • Road
 • Sea (per IMDG Special Provision 238)



Barcode





9319632520970

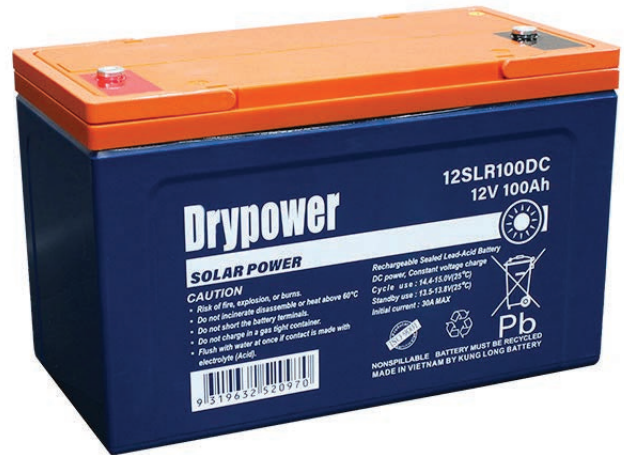


DIMENSIONS

mm (inch)

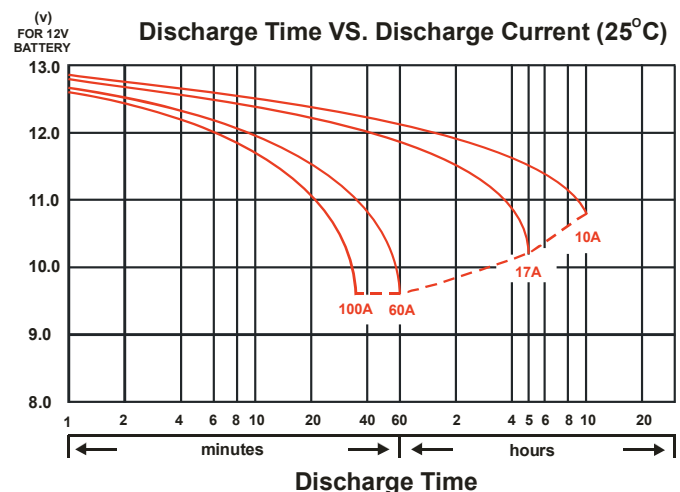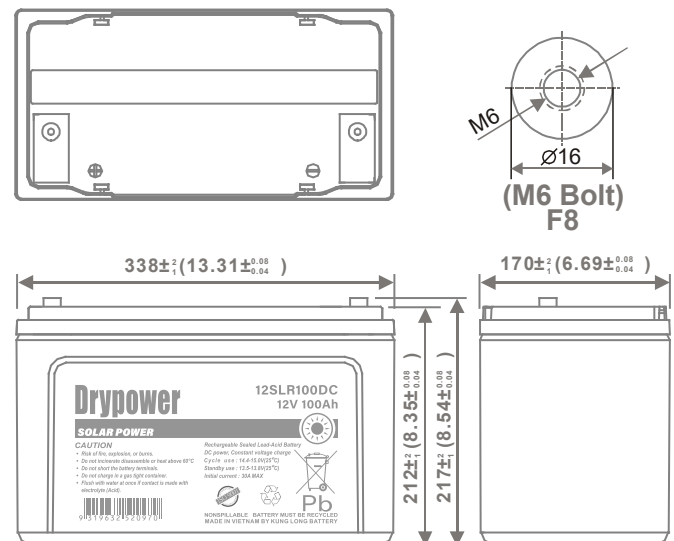

CHARACTERISTICS CHARTS

Relationship Between Temperature and Charging Voltage


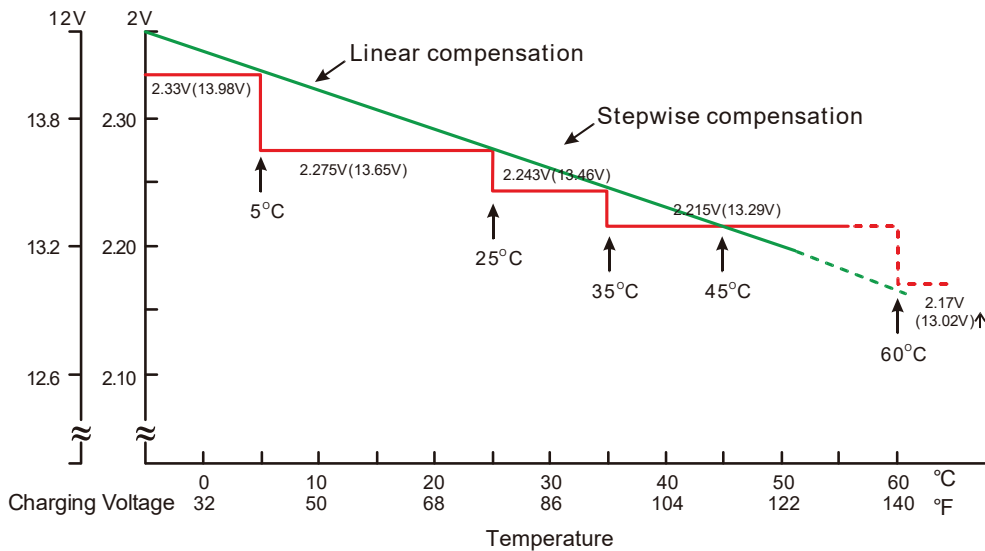


FEATURES & BENEFITS


- ◆ Industry leading 99.99% pure lead content for superior service life and dependable performance.
- ◆ Lead Carbon negative plate for better partial SOC performance and reduced sulphation meaning longer service life.
- ◆ Enhanced charge acceptance for quicker energy recovery best suited to renewable energy systems.
- ◆ Maintenance free technology and non-spillable design.
- ◆ Extremely low self discharge characteristics.
- ◆ Manufactured by Kung Long Battery (KLB) at facilities in Taiwan and Vietnam. KLB is a leading manufacturer and complies with relevant international quality standards including ISO9001, CE ETL9000, UL1989, OHSAS18001 and ISO17025. KLB supports Green Sustainable supply chain practices.



Effect of Temperature on Capacity 25°C(77°F)

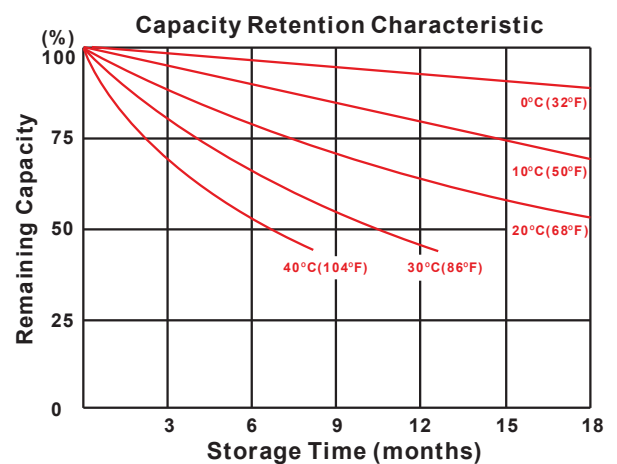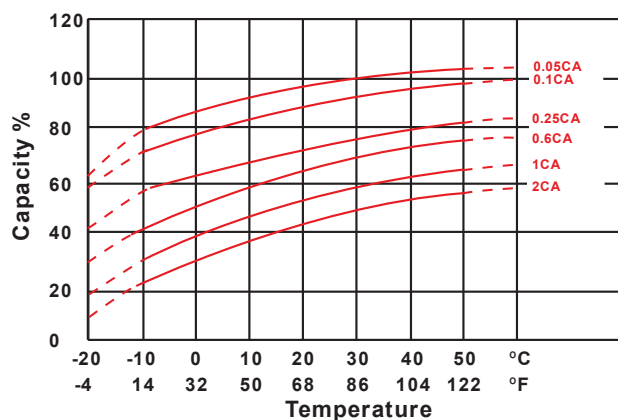

Cycle Service Life

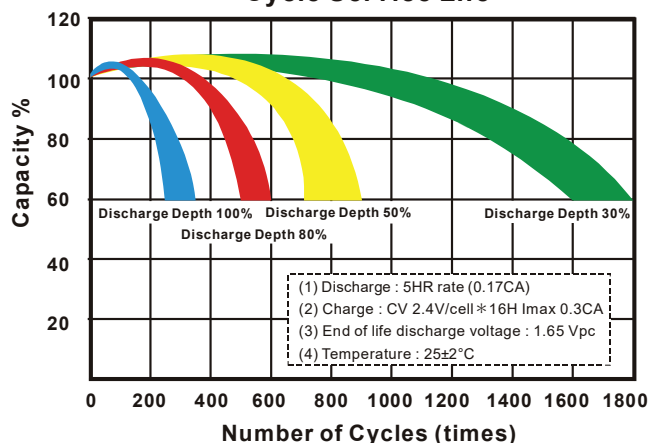

Aug2025

Performance may vary depending on application. All specifications are correct at time of creation. All specifications and operation conditions contained in this datasheet are subject to change or improvement without prior notice to the user. This data is for evaluation purposes only. No guarantee is intended or implied by this data. For clarification and updated information, please contact us.