



6V

1.2Ah

SLA

AGM

6SB1.2P

Rechargeable AGM Sealed Lead Acid Battery

SPECIFICATIONS

Nominal Voltage 6V

Nominal Capacity

20 hour rate	(0.06A to 5.25V)	1.2Ah
10 hour rate	(0.114A to 5.25V)	1.14Ah
5 hour rate	(0.204A to 5.1V)	1.02Ah
1C	(1.2A to 4.8V)	0.68Ah
3C	(3.6A to 4.8V)	0.48Ah

Weight Approx. 297g

Internal Resistance (at 1KHz) Approx. 41mΩ

Maximum Discharge Current (5 secs) 18A

Charge Methods at 25°C

Cycle Use

Charging Voltage 7.20V to 7.50V
Coefficient -5.0mV/°C/Cell

Maximum Charging Current 0.36A

Standby Use

Float Charging Voltage 6.75V to 6.90V
Coefficient -3.0mV/°C/Cell

Operating Temperature Range

Charge -15°C to 50°C*

Discharge -15°C to 50°C

Storage -15°C to 40°C

Charge Retention (Shelf Life) at 20°C

1 month	92%
3 months	90%
6 months	80%

Case Material ABS UL94 HB

Termination F1 (Faston Tab 187)

Design Life 3-5 years

Classified as a non-spillable battery.

Approved for transportation by:

- Air (IATA/ICAO provision A67)
- Road
- Sea (per IMDG Special Provision 238)



Barcode




9319632520529




DIMENSIONS

mm (inch)

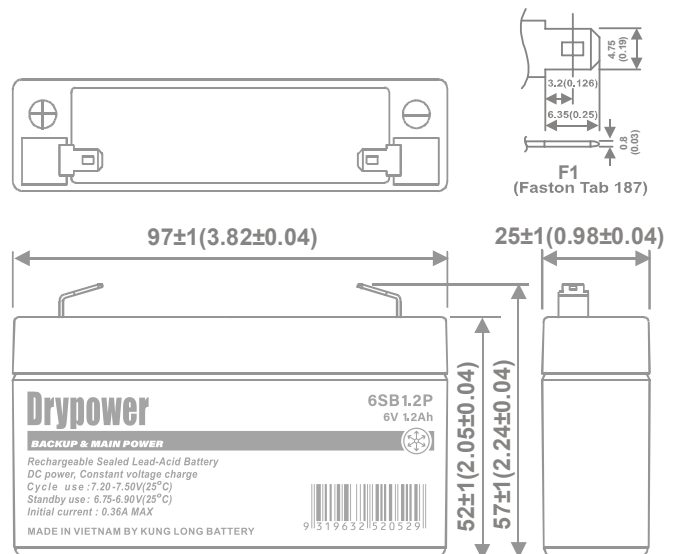


Discharge Time VS. Discharge Current (25°C)

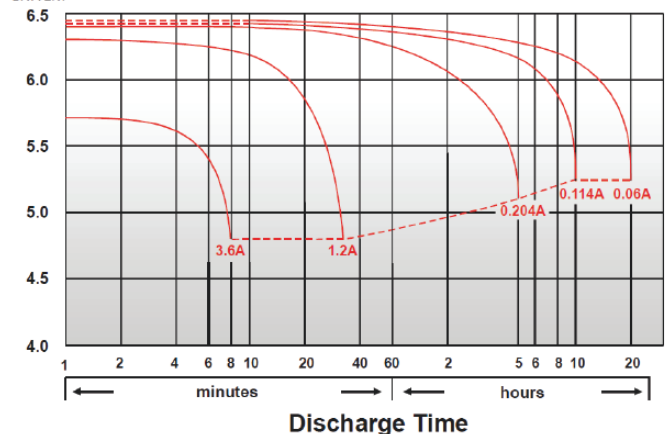


* If charging above 40°C, always use temperature-compensated charging (refer charge methods above). High temperature use accelerates ageing; as a general guide, service life halves for every 10°C sustained rise above 25°C. Consult the engineers at MI for more information if required.

CHARACTERISTICS CHARTS


Effect of Temperature on Capacity 25°C (77°F)

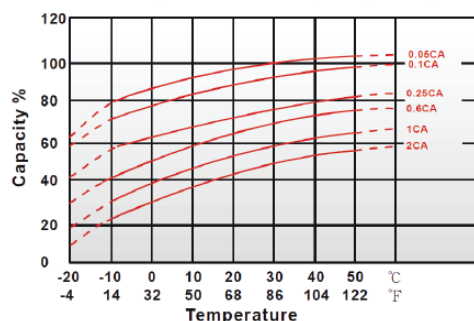


Capacity Retention Characteristic

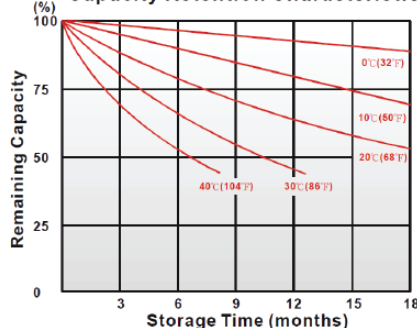

Cycle Service Life

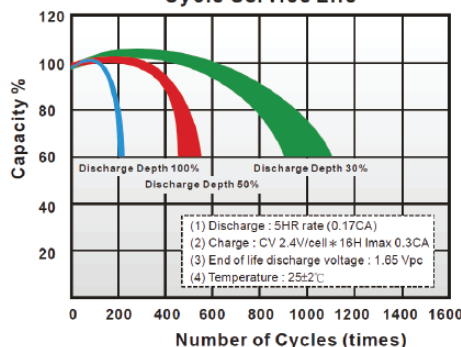

Trickle (or float) Service Life



FEATURES & BENEFITS

- ♦ Industry leading 99.99% pure lead content for superior service life and dependable performance.
- ♦ Maintenance free technology and non-spillable design.
- ♦ Excellent charge retention in storage.
- ♦ Higher percentage of tin content compared with the industry standard. Tin extends battery standby life by minimising sulphation (corrosion) especially at higher temperatures.
- ♦ Manufactured by Kung Long Battery (KLB) at facilities in Taiwan and Vietnam.

KLB is a leading manufacturer and complies with relevant international quality standards including ISO9001, CE ETL9000, UL1989, OHSAS18001 and ISO17025.

KLB supports Green Sustainable supply chain practices.



PERFORMANCE DATA

Discharge Rates in Watts to Various End Voltages at 25°C (77°F)

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
Time								
5	min	7.18	7.82	8.27	8.65	8.8	8.98	9.28
10	min	4.62	5	5.3	5.52	5.58	5.67	5.77
15	min	3.65	3.87	4.05	4.2	4.25	4.32	4.38
30	min	2.15	2.25	2.32	2.37	2.38	2.42	2.45
60	min	1.32	1.39	1.43	1.47	1.48	1.5	1.52
120	min	0.747	0.808	0.847	0.875	0.887	0.9	0.915
180	min	0.533	0.573	0.602	0.623	0.633	0.645	0.657
240	min	0.435	0.47	0.495	0.513	0.52	0.528	0.537
300	min	0.42	0.442	0.457	0.468	0.47	0.477	0.482
600	min	0.22	0.233	0.243	0.25	0.25	0.255	0.258
1200	min	0.123	0.126	0.129	0.13	0.131	0.131	0.132

Discharge Rates in Amperes to Various End Voltages at 25°C (77°F)

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
Time								
5	min	3.49	4.11	4.57	4.94	5.09	5.26	5.51
10	min	2.12	2.43	2.63	2.81	2.88	2.96	3.11
15	min	1.71	1.95	2.09	2.2	2.24	2.29	2.35
30	min	0.931	1.06	1.17	1.24	1.26	1.29	1.32
60	min	0.68	0.716	0.735	0.759	0.765	0.772	0.779
120	min	0.392	0.415	0.429	0.44	0.444	0.449	0.456
180	min	0.272	0.291	0.302	0.311	0.314	0.318	0.324
240	min	0.22	0.238	0.247	0.254	0.257	0.26	0.264
300	min	0.207	0.219	0.226	0.231	0.233	0.236	0.238
600	min	0.112	0.117	0.121	0.124	0.125	0.126	0.127
1200	min	0.0615	0.0624	0.0631	0.0637	0.0639	0.0642	0.0646

All data on the spec. sheet is an average value:

The tolerance range : $X < 6\text{min}$ (+15%~-15%), $6\text{min} \leq X < 10\text{min}$ (+12%~-12%), $10\text{min} \leq X < 60\text{min}$ (+8%~-8%), $X \geq 60\text{min}$ (+5%~-5%)

Aug2026

Performance may vary depending on application. All specifications are correct at time of creation. All specifications and operation conditions contained in this datasheet are subject to change or improvement without prior notice to the user. This data is for evaluation purposes only. No guarantee is intended or implied by this data. For clarification and updated information, please contact us.