



6V

2.8Ah

SLA

AGM

6SB2.8P

Rechargeable AGM Sealed Lead Acid Battery

SPECIFICATIONS

Nominal Voltage 6V

Nominal Capacity

20 hour rate	(0.140A to 5.25V)	2.8Ah
10 hour rate	(0.266A to 5.25V)	2.66Ah
5 hour rate	(0.476A to 5.1V)	2.38Ah
1C	(2.8A to 4.8V)	1.587Ah
3C	(8.4A to 4.8V)	1.12Ah

Weight Approx. 570g

Internal Resistance (at 1KHz) Approx. 22mΩ

Maximum Discharge Current (5 secs) 42A

Charge Methods at 25°C

Cycle Use

Charging Voltage 7.20V to 7.50V
Coefficient -5.0mV/°C/Cell

Maximum Charging Current 0.84A

Standby Use

Float Charging Voltage 6.75V to 6.90V
Coefficient -3.0mV/°C/Cell

Operating Temperature Range

Charge	-15°C to 50°C*
Discharge	-15°C to 50°C
Storage	-15°C to 40°C

Charge Retention (Shelf Life) at 20°C

1 month	92%
3 months	90%
6 months	80%

Case Material ABS UL94 HB

Termination F1 (Faston Tab 187)

Design Life 3-5 Years

Classified as a non-spillable battery.

Approved for transportation by:

- Air (IATA/ICAO provision A67)
- Road
- Sea (per IMDG Special Provision 238)



Barcode




9319632520550




DIMENSIONS

mm (inch)

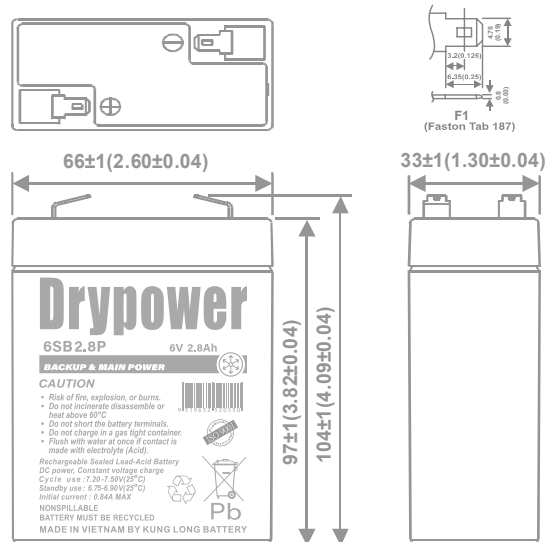

(V)
FOR 6V
BATTERY


Discharge Time VS. Discharge Current (25°C)

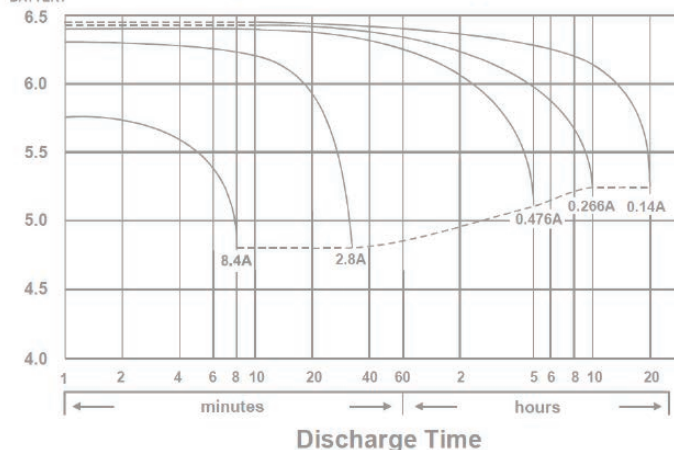


* If charging above 40°C, always use temperature-compensated charging (refer charge methods above). High temperature use accelerates ageing; as a general guide, service life halves for every 10°C sustained rise above 25°C. Consult the engineers at MI for more information if required.

CHARACTERISTICS CHARTS


Effect of Temperature on Capacity 25°C(77°F)

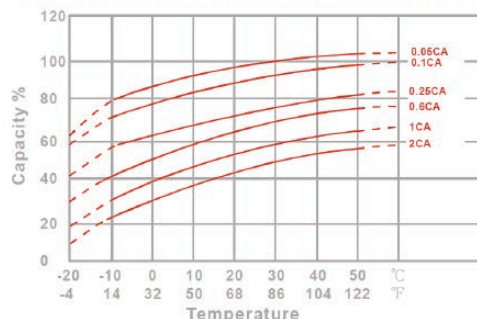


Capacity Retention Characteristic

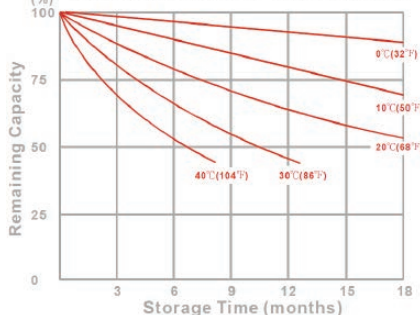

Cycle Service Life

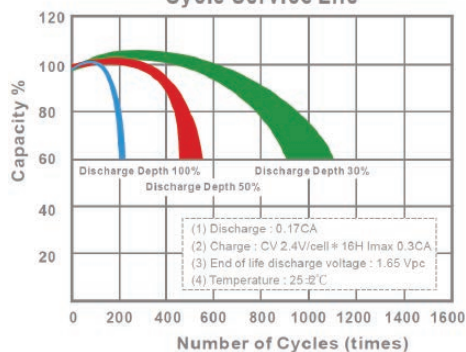

Trickle (or float) Service Life

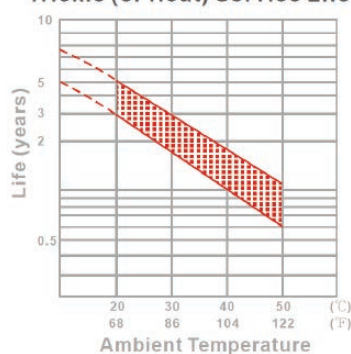

FEATURES & BENEFITS

- ♦ Industry leading 99.99% pure lead content for superior service life and dependable performance.
- ♦ Maintenance free technology and non-spillable design.
- ♦ Excellent charge retention in storage.
- ♦ Higher percentage of tin content compared with the industry standard. Tin extends battery standby life by minimising sulphation (corrosion) especially at higher temperatures.
- ♦ Manufactured by Kung Long Battery (KLB) at facilities in Taiwan and Vietnam.

KLB is a leading manufacturer and complies with relevant international quality standards including ISO9001, CE ETL9000, UL1989, OHSAS18001 and ISO17025.

KLB supports Green Sustainable supply chain practices.

