

51.2V

30Ah

LiFePO₄

1536Wh

48LFP30

Rechargeable Lithium Iron Phosphate Battery

SPECIFICATIONS

Nominal Voltage	51.2V
Nominal Capacity @5hr Rate	30Ah
Watt-hour	1536Wh
Weight	11.1kg
Internal Resistance (at 1KHz)	≤60mΩ

Charge @25°C

Standard Charge Current	15A
Maximum Charge Current	30A
Max Charge Voltage	57.6V

Discharge @25°C

Standard Discharge Current	15A
Max. Continuous Discharge	50A max if used standalone, 30A max if used in parallel
Pulse Discharge	37.5A (30 secs)
Cut-off Voltage	40.0V

Cell Used	32140 15Ah Cell
-----------	-----------------

Assembly	16S2P-Cyl
----------	-----------

Cycle Life (±0.5C, 25°C)

100% DoD	≥2000 cycles
80% DoD	≥4000 cycles
50% DoD	≥5000 cycles

Operating Temperature

Charge	0°C ~ +45°C
Discharge	-20°C ~ +60°C
Storage	-20°C ~ +45°C

Operating Humidity Range	5% – 85%
--------------------------	----------

Case Material	UL94 V-0
---------------	----------

Termination	F18 (M8 Bolt)
-------------	---------------

Torque Settings	8.2 N.m
-----------------	---------

Ingress Protection Rating	IP64
---------------------------	------


Series Connection	Stand alone use only
-------------------	----------------------

Parallel Connection	Max. 4 pcs. The total discharge current after parallel connection should not exceed the max current of the single pack.
---------------------	--

Barcode







931963253075







Any orientation - Drypower Rechargeable Lithium batteries with cylindrical LiFePO₄ cells inside can be used and mounted in any orientation, offering ultimate flexibility in a wide variety of applications.

DIMENSIONS

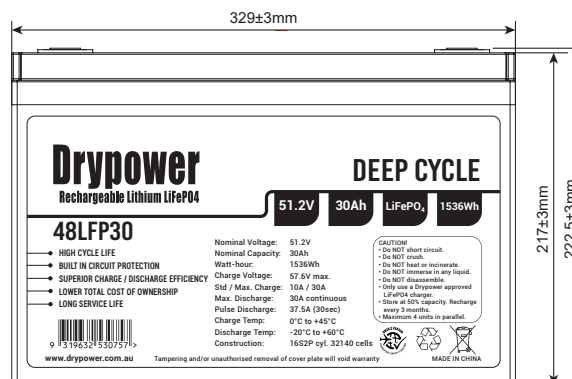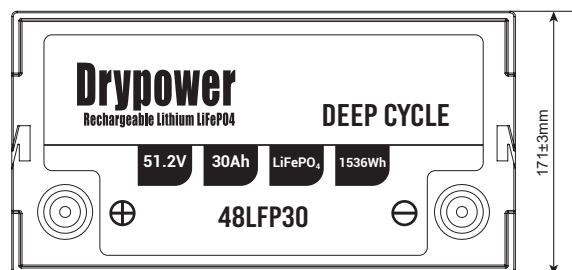

CHARACTERISTICS CHARTS

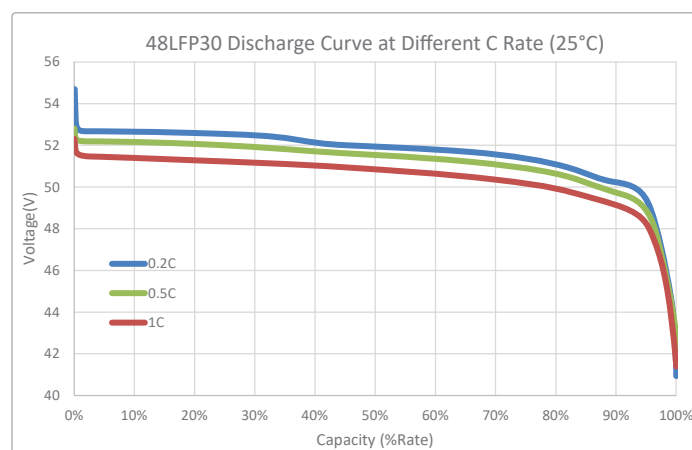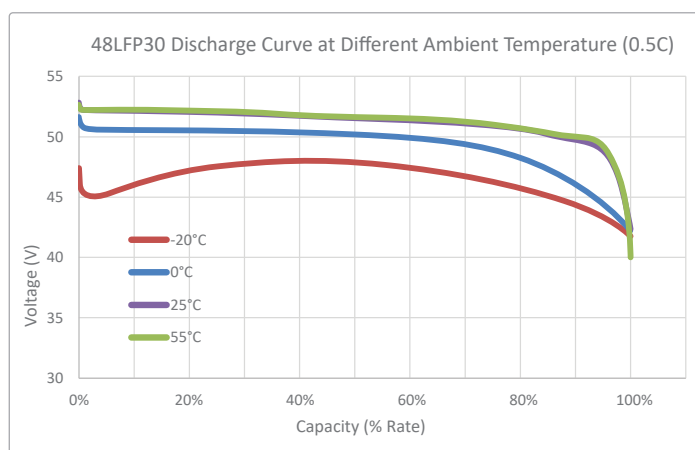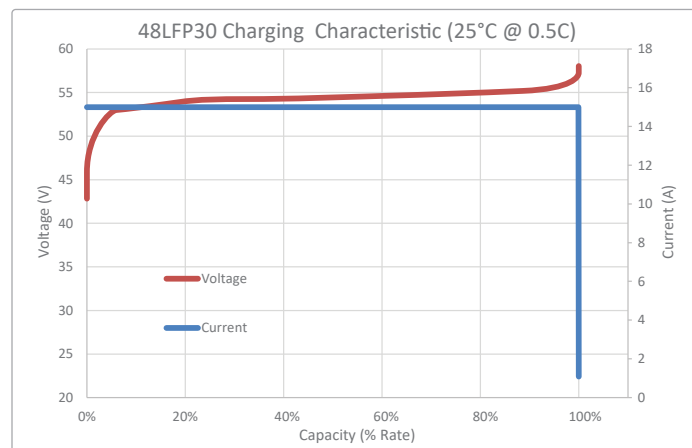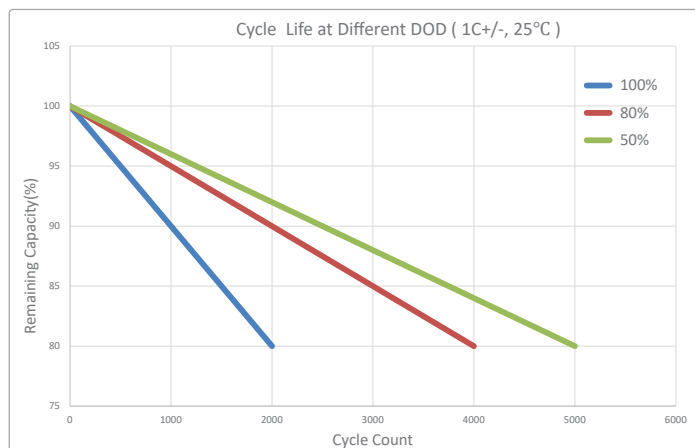

FEATURES & BENEFITS



Long Service Life

>2000 cycles @100% DoD (25°C) to 80% of original capacity - longer service life than SLA to reduce maintenance costs.



High Energy Density - More Power p/kg

Higher total system capacity and superior utilisation (full 100% DoD) to reduce overall system size and footprint.



Robust Enclosure

Enclosed in IP5x (dust resistant) or IP6x (dust tight) case with closed loop terminals - suitable for harsh environments.



Stable Chemistry & Built-in Circuit Protection

IEC & UN38.3 Safety Certified at cell level and integrated BMS protection to ensure safety and prevent damage.



Lightweight

Approx. 1/2 the weight (or less) of equivalent in SLA means lower logistics costs and minimal OH&S concerns.



Superior Charge & Discharge Efficiency

Faster charge/discharge rates (C/2 LiFePO4 vs C/20 SLA) for higher power usage and less downtime when charging.



Wide Operating Temperature Tolerance

Suitable for use in a wider range of applications where ambient temperature is atypical: from -20°C up to +60°C.



Fully Recyclable Battery

An environmentally friendly battery option, with no lead or calcium that can leak into the environment.

BUILT-IN PROTECTION

All Drypower Rechargeable Lithium batteries adhere to strict safety guidelines by incorporating Battery Management Systems (BMS) that include protection components such as:

- Integrated Circuit (IC)
- MOSFET
- Fuse
- Thermistor
- Protection Circuit Module (PCM)

The BMS in each Drypower battery helps to:

1. Maintain safety for users.
2. Prevent damage to equipment and property.
3. Eliminate concerns about use of the wrong type of charger.
4. Minimise the risk of overdischarge causing damage.
5. Provide short circuit and overcharge protection.

CAUTIONS

- Do NOT short circuit, crush or disassemble.
- Do NOT heat or incinerate.
- Do NOT immerse in any liquid.
- Do NOT allow the battery to become overdischarged. If possible, isolate the battery when not in use.
- Do NOT leave the battery in a discharged state. Always recharge after use with a Drypower approved LiFePO4 charger.
- Store at 50% capacity. Recharge every 3 months. The storage area should be clean, cool, dry and ventilated.
- Maximum 1 unit in series. Maximum 4 units in parallel, not exceeding the max current of the single pack.

Performance may vary depending on application. All specifications are correct at time of creation. All specifications and operation conditions contained in this datasheet are subject to change or improvement without prior notice to the user. This data is for evaluation purposes only. No guarantee is intended or implied by this data. For clarification and updated information, please contact us • Feb2026