

IFM12-200E3 (12.8V 20Ah)

Smart Model

SPECIFICATIONS


Nominal Voltage	12.8V
Nominal Capacity @5hr Rate	20Ah
Watt-hour	256.0Wh
Dimensions	
Length	181mm
Width	76mm
Height	166mm
Weight	2.5kg
Internal Resistance (at 1KHz)	≤ 40mΩ
Charge @25°C	
Standard Charge Current	4A
Maximum Charge Current	10A
Cut-off Voltage	14.4V (14.6V max.)
Discharge @25°C	
Standard Discharge Current	4A
Max. Continuous Discharge	15A
Cut-off Voltage	10.0V (9.6V min.)
Assembly	26650 - 4S6P
Operating Temp	
Charge	0 - +50°C
Discharge	-10 - +60°C
Storage	-10 - +40°C
Humidity	RH≤85%
Case Material	ABS+PC
Termination	M5 Bolt
Fuel Gauge	Yes (4 LED Indication)
Communications Port	SMBus (PIN1:N/A; PIN2:SMBC; PIN3:SMBD; PIN4:GND)
Maximum Modules In Series	2
Protection: Overcharge protection, over discharge protection, over temperature protection, over current protection, balancing function	



Drypower Rechargeable Lithium (LiFePO4) batteries offer unmatched performance in a wide range of industrial or high drain applications.

With its impressive cycle life of up to 2000 cycles, implementing Drypower batteries drastically reduces overall total cost of ownership compared to SLA batteries.

DIMENSIONS

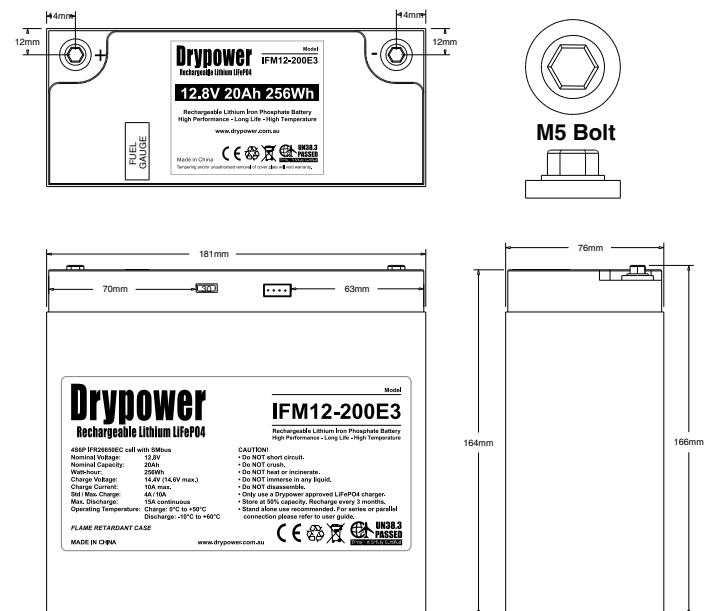

BUILT IN PROTECTION


All Drypower Rechargeable Lithium batteries adhere to strict safety guidelines by incorporating Battery Management Systems (BMS) that include protection components such as:

- Integrated Circuit (IC)
- Thermistor
- MOSFET
- Protection Circuit Module (PCM)
- Fuse
- SMBus Communications Port

The BMS in each Drypower battery helps to:


1. Maintain safety for users.
2. Prevent damage to equipment and property.
3. Eliminate concerns about use of the wrong type of charger.
4. Minimise the risk of overdischarge causing damaging.
5. Provide short circuit and overcharge protection.

Discharge Voltage Profiles @ 0.5C Discharge Rate
Various Ambient Temperatures

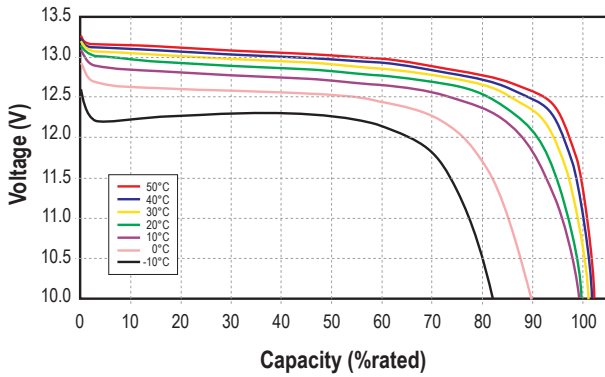


Discharge Capacity Performance


Charged: 0.5C to 14.6V, CV@14.6 to 1A
Discharged: 0.5C to 10.5V

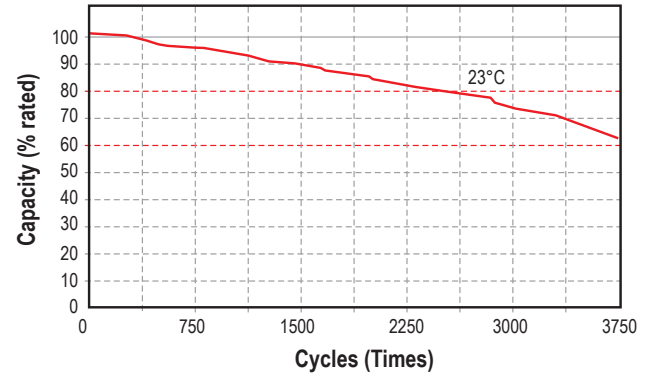

Discharge Voltage Profiles @ Various Temperatures
23°C Ambient Temperatures

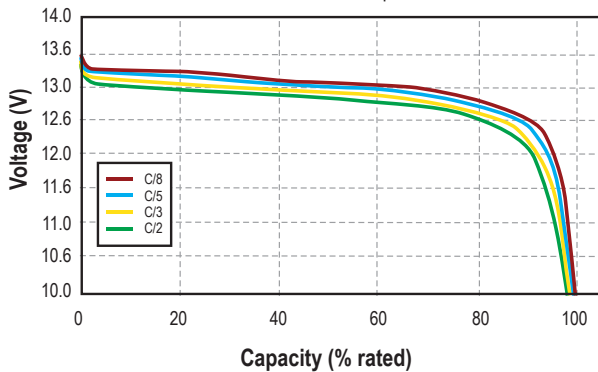

Typical Voltage Profiles & SOC Profiles @ 0.5C Charging
23°C Ambient Temperatures

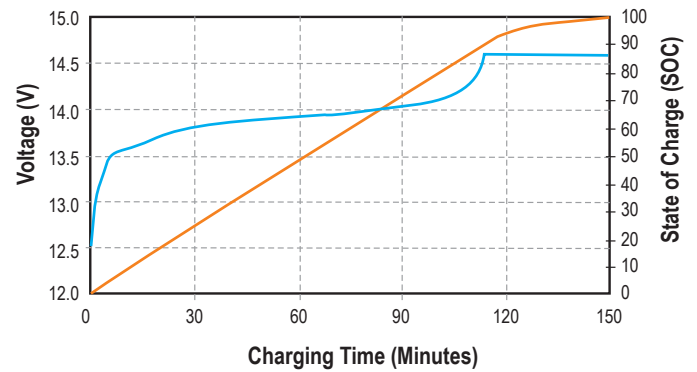

FEATURES & BENEFITS



High cycle life

>2000 cycles @80% DoD for effectively lower total cost of ownership.



Lightweight

Drypower Lithium batteries provide more Wh/Kg while also being up to 1/3 the weight of its SLA equivalent.



Built in circuit protection

Battery Management Systems (BMS) are incorporated to maintain safety and prevent damage.



Better storage

12-18+ months thanks to its extremely low self discharge (LSD) rate and no risk of sulphation.



Quickly recharge

Save time and increase productivity with less down time thanks to superior charge/discharge efficiency.



Extreme heat tolerance

Suitable for use in a wider range of applications where ambient temperature is unusually high: up to +60°C.



Longer service life

Low maintenance batteries with stable chemistry. Easily monitor state of health (SoH) of smart models.

SUITABLE APPLICATIONS

Lithium Iron Phosphate can be used in any application that would normally use Lead Acid, GEL or AGM type batteries*. LiFePO4 in 4S = 12.8V and 8S = 25.6V is closest to Lead Acid equivalents of the lithium rechargeable types.

Suitable applications include caravan, marine, golf carts & buggies, solar storage, remote monitoring, switching applications and more.

**Exceptions may apply so please consult with a Drypower technical expert for more information regarding your application.*

CAUTIONS

- Do NOT short circuit, crush or disassemble.
- Do NOT heat or incinerate.
- Do NOT immerse in any liquid.
- Only use a Drypower approved LiFePO4 charger.
- Store at 50% capacity. Recharge every 3 months. The storage area should be clean, cool, dry and ventilated.