

12V

925  
CCA

110Ah

AGM

## 12CB925

Deep Cycle & Starting 12V AGM Battery

### SPECIFICATIONS

Nominal Voltage	12V	
Nominal Capacity		
100 hour rate (1.155A to 10.80V)	115.5Ah	
20 hour rate (5.5A to 10.50V)	110Ah	
10 hour rate (10.45A to 10.50V)	104.5Ah	
5 hour rate (18.7A to 10.20V)	93.5Ah	
Weight	Approx. 32.5kg	
Internal Resistance (at 1KHz)	Approx. 4.5mΩ	
Cold Cranking Amps (CCA) (-17.8°C)	925A	
Marine Cranking Amps (MCA) (0°C)	1160A	
Reserve Capacity (RC) (25°C)	210min 25A to 10.50V	
Charge Methods at 25°C		
Cycle Use		
Charging Voltage	13.8V to 14.6V	
Coefficient -5.0mV/°C/Cell		
Recommended Charging Current	33A	
Standby Use		
Float Charging Voltage	13.4V to 13.6V	
Coefficient -3.0mV/°C/Cell		
Operating Temperature Range		
Charge	-15°C to 40°C	
Discharge	-15°C to 50°C	
Storage	-15°C to 40°C	
Charge Retention (Shelf Life) at 20°C		
1 month	98%	
3 months	94%	
6 months	85%	

Case Material	ABS UL94 HB
Termination	Dual post terminal

Classified as a non-spillable battery.  
Approved for transportation by:

- Air (IATA/ICAO provision A67)
- Road
- Sea (per IMDG Special Provision 238)



Barcode




9319632521342





**Upright orientation recommended** - Can be mounted on any side (except upside down). Use upright position for the best service life.

### DIMENSIONS


mm (inch)

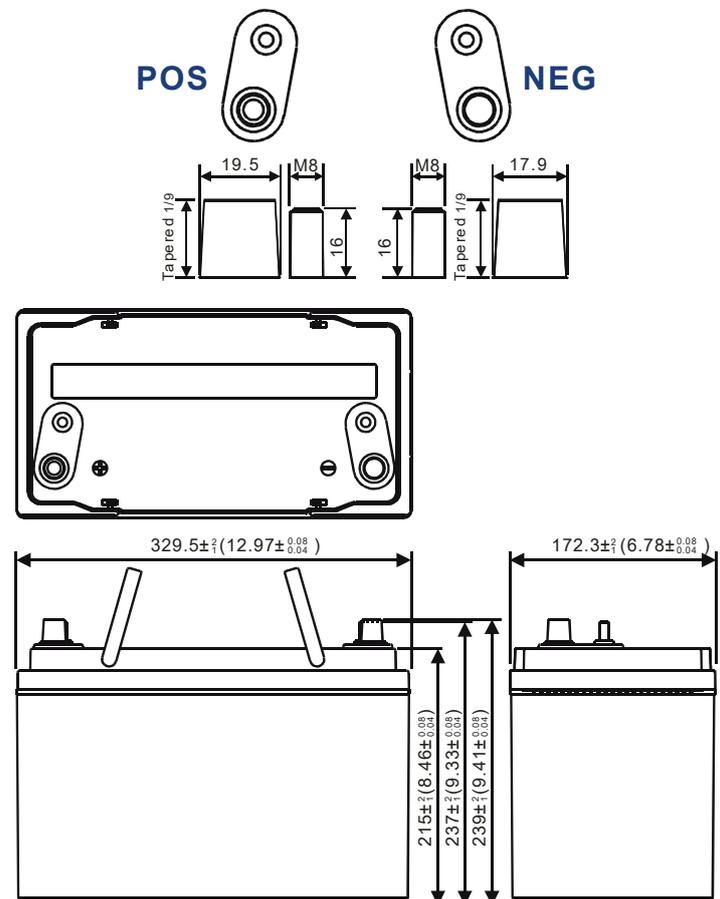


### CHARACTERISTICS CHARTS

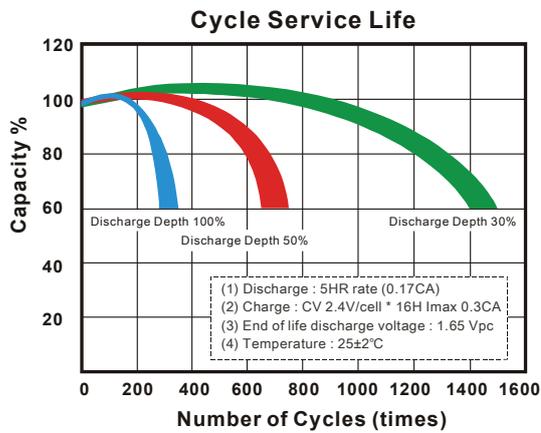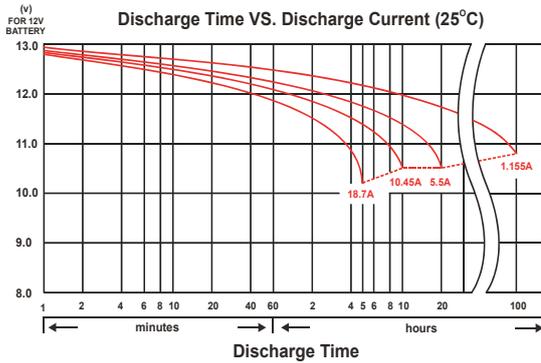


### Effect of Temperature on Capacity 25°C

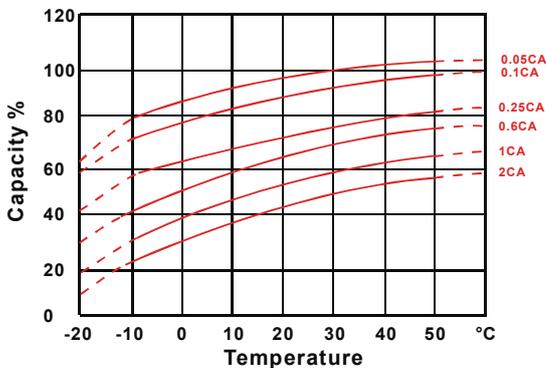

### Capacity Retention Characteristic

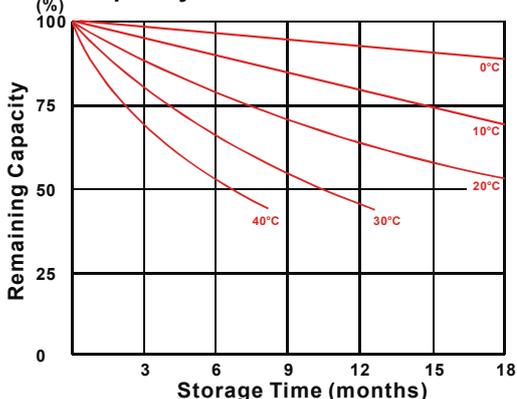

### INTERNAL FEATURES

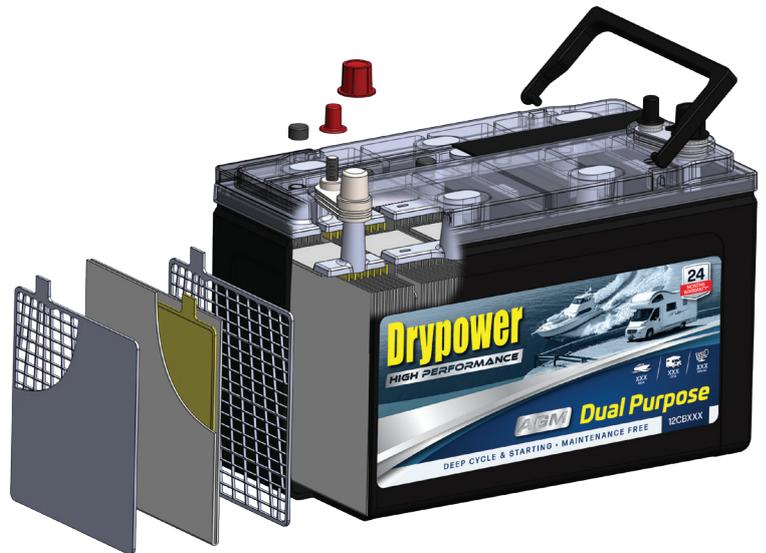

- Cast-on-Strap (COS) manufacture process providing a thicker cast for more consistent cell assembly, improved discharge performance and lower electrical resistance to promote longer service life.
- Flame arrester safety system to mitigate leakage, prevent dust exposure and minimise spark related issues.
- Rugged UL94HB ABS casing, vibration & explosion proof tested to JIS C 8702:2009 & 8701:2006.
- Enhanced Nanoscale carbon formula plate paste to reduce water loss and improves charge acceptance for superior performance and cycle life.
- Hi-tech AGM separator can absorb and trap electrolyte, preventing loss whilst promoting conductivity.

### FEATURES & BENEFITS

- Maintenance free, non-spillable design for hassle-free installation and service life.
- Dual terminal setup (AUTO POST and STUD) to designed to provide secure and reliable connections between the battery and auxiliary power loads.
- Exceptional cranking/starting power with better cold start performance when compared to conventional lead acid batteries.
- True deep cycle capability to provide reliable power to house power demands, accessory loads or even trolling motor use.
- Vibration proof design and rated for auxiliary Under-Bonnet use.
- Integrated ergonomic carry handle for safe handling and installation.
- Lower self-discharge performance compared to conventional batteries means longer shelf or storage life.
- Practical mounting options to suit a variety of applications and fitment locations. Can be mounted on any side - except upside down.
- UL approved.
- 24 months warranty for private use, 12 months for commercial &/or under-bonnet auxiliary use.

Performance may vary depending on application. All specifications are correct at time of creation. All specifications and operation conditions contained in this datasheet are subject to change or improvement without prior notice to the user. This data is for evaluation purposes only. No guarantee is intended or implied by this data. For clarification and updated information, please contact us. Nov2023