



12V

22Ah

SLA

CYCLIC
AGM

12SB22C

Rechargeable AGM Sealed Lead Acid Battery

SPECIFICATIONS

Nominal Voltage 12V

Nominal Capacity

20 hour rate	(1.10A to 10.50V)	22Ah
10 hour rate	(2.09A to 10.50V)	20.9Ah
5 hour rate	(3.74A to 10.20V)	18.7Ah
1C	(22A to 9.60V)	12.47Ah
3C	(66A to 9.60V)	8.8Ah

Weight Approx. 6.9kg

Internal Resistance (at 1KHz) Approx. 9mΩ

Maximum Discharge Current (5 secs) 330A

Charge Methods at 25°C

Cycle Use

Charging Voltage 14.4V to 15.0V
Coefficient -5.0mV/°C/Cell

Maximum Charging Current 6.6A

Standby Use

Float Charging Voltage 13.5V to 13.8V
Coefficient -3.0mV/°C/Cell

Operating Temperature Range

Charge -15°C to 50°C*

Discharge -15°C to 50°C

Storage -15°C to 40°C

Charge Retention (Shelf Life) at 20°C

1 month	92%
3 months	90%
6 months	80%

Case Material ABS UL94 HB

Termination F8 (M6 Bolt)

Description of Torque Value of Hardware for the Terminals

Recommended Torque Value M6: 7 N-m (71kgf-cm)
Max. Allowable Torque Value M6: 9 N-m (92kgf-cm)

Design Life 3-5 years

Classified as a non-spillable battery.

Approved for transportation by:

- Air (IATA/ICAO provision A67)
- Road
- Sea (per IMDG Special Provision 238)



Barcode





9319632520277




DIMENSIONS

mm (inch)

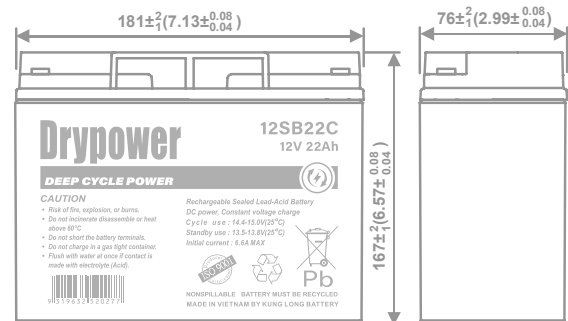


Discharge Time VS. Discharge Current (25°C)

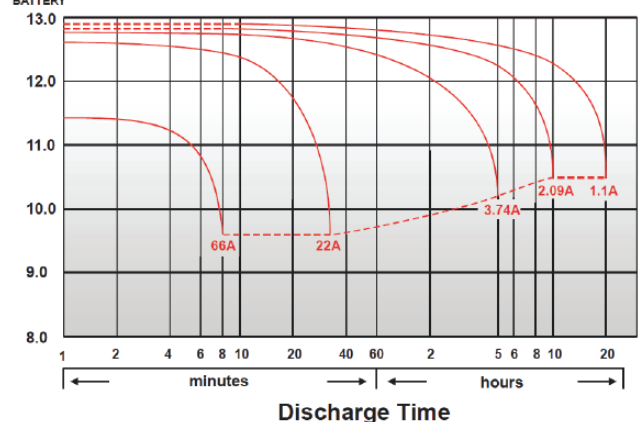


* If charging above 40°C, always use temperature-compensated charging (refer charge methods above). High temperature use accelerates ageing; as a general guide, service life halves for every 10°C sustained rise above 25°C. Consult the engineers at MI for more information if required.

CHARACTERISTICS CHARTS


Effect of Temperature on Capacity 25°C (77°F)

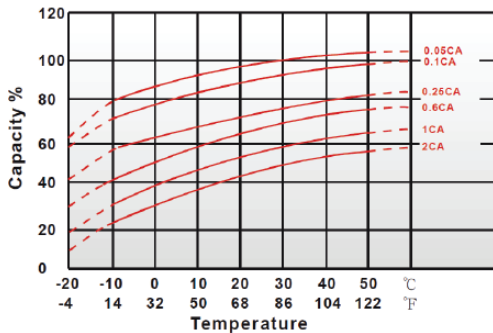


Capacity Retention Characteristic

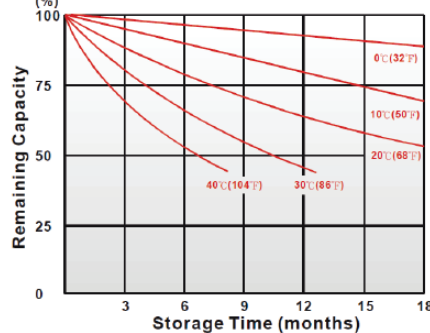

Cycle Service Life

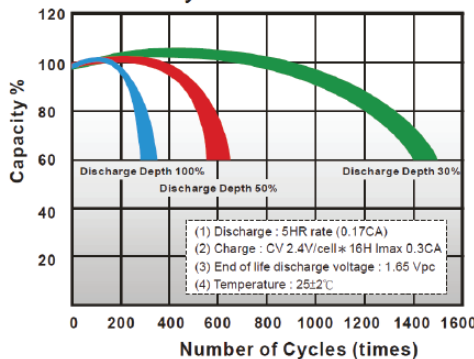

Trickle (or float) Service Life

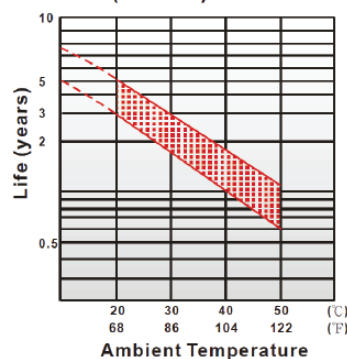

FEATURES & BENEFITS

- ♦ Industry leading 99.99% pure lead content for superior service life and dependable performance.
- ♦ Special grid frame alloy design with outstanding anti-corrosion performance.
- ♦ Maintenance free technology and non-spillable design.
- ♦ Suitable for use in any orientation (except inverted) for use in hard to reach locations.
- ♦ Higher percentage of tin content compared with the industry standard. Tin extends battery standby life by minimising sulphation (corrosion) especially at higher temperatures.
- ♦ Manufactured by Kung Long Battery (KLB) at facilities in Taiwan and Vietnam. KLB is a leading manufacturer and complies with relevant international quality standards including ISO9001, CE ETL9000, UL1989, OHSAS18001 and ISO17025. KLB supports Green Sustainable supply chain practices.



PERFORMANCE DATA

Discharge Rates in Watts to Various End Voltages at 25°C (77°F)

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
Time								
5	min	136	152	164	171	173	175	177
10	min	88.3	99.7	107	112	113	114	116
15	min	67.4	75.1	80.1	83.2	84.1	85	85.8
30	min	39.8	43.9	46.6	48.3	48.8	49.3	49.7
60	min	25.2	26	26.7	27.1	27.3	27.4	27.6
120	min	15.2	15.5	15.7	15.9	16	16.1	16.2
180	min	10.8	11.1	11.3	11.4	11.5	11.5	11.6
240	min	8.6	8.87	9.02	9.14	9.19	9.24	9.31
300	min	7.25	7.48	7.65	7.78	7.84	7.87	7.91
600	min	4.12	4.32	4.47	4.57	4.60	4.63	4.67
1200	min	2.2	2.28	2.35	2.41	2.42	2.44	2.45

Discharge Rates in Amperes to Various End Voltages at 25°C (77°F)

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
Time								
5	min	74.8	83.3	90.1	97.6	99.3	102	105
10	min	48.1	54	57.4	59.9	60.8	61.5	62.3
15	min	36.6	41.4	43.1	44.4	44.8	45.3	45.9
30	min	20	22.1	23.5	24.2	24.4	24.7	25.1
60	min	12.4	12.8	13.1	13.4	13.5	13.6	13.8
120	min	7.61	7.83	7.98	8.12	8.16	8.21	8.27
180	min	5.32	5.51	5.64	5.75	5.79	5.83	5.88
240	min	4.17	4.33	4.45	4.54	4.58	4.61	4.65
300	min	3.56	3.68	3.77	3.84	3.87	3.89	3.92
600	min	2.06	2.14	2.21	2.26	2.27	2.29	2.31
1200	min	1.07	1.12	1.16	1.19	1.2	1.21	1.22

All data on the spec. sheet is an average value:

The tolerance range : X < 6min (+15%~-15%), 6min ≤ X < 10min (+12%~-12%), 10min ≤ X < 60min (+8%~-8%), X ≥ 60min (+5%~-5%)

Aug2026

Performance may vary depending on application. All specifications are correct at time of creation. All specifications and operation conditions contained in this datasheet are subject to change or improvement without prior notice to the user. This data is for evaluation purposes only. No guarantee is intended or implied by this data. For clarification and updated information, please contact us.