

Drypower

LONG LIFE RANGE
STANDBY LONG LIFE POWER



12V

5Ah

SLA

AGM

12SB5TL

Rechargeable AGM Sealed Lead Acid Battery

SPECIFICATIONS

Nominal Voltage 12V

Nominal Capacity

20 hour rate	(0.25A to 10.50V)	5Ah
10 hour rate	(0.475A to 10.50V)	4.75Ah
5 hour rate	(0.85A to 10.20V)	4.25Ah
1C	(5A to 9.60V)	3.17Ah
3C	(15A to 9.60V)	2.0Ah

Weight Approx. 1.9kg

Internal Resistance (at 1KHz) Approx. 19mΩ

Maximum Discharge Current (5 secs) 75A

Charge Methods at 25°C

Standby Use

Float Charging Voltage	13.5V to 13.8V
Coefficient -3.0mV/°C/Cell	
Maximum Charging Current	1.5A

Operating Temperature Range

Charge	-15°C to 50°C*
Discharge	-15°C to 50°C
Storage	-15°C to 40°C

Charge Retention (Shelf Life) at 20°C

1 month	92%
3 months	90%
6 months	80%

Case Material ABS UL94 HB

Termination F2 (Faston 250)

Description of Torque Value of Hardware for the Terminals

Recommended Torque Value	N/A
Max. Allowable Torque Value	

Design Life

Expected Trickle Design Life

6-9 years at 20°C

Classified as a non-spillable battery.

Approved for transportation by:

- Air (IATA/ICAO provision A67)
- Road
- Sea (per IMDG Special Provision 238)



Barcode




9319632521137




DIMENSIONS

mm (inch)

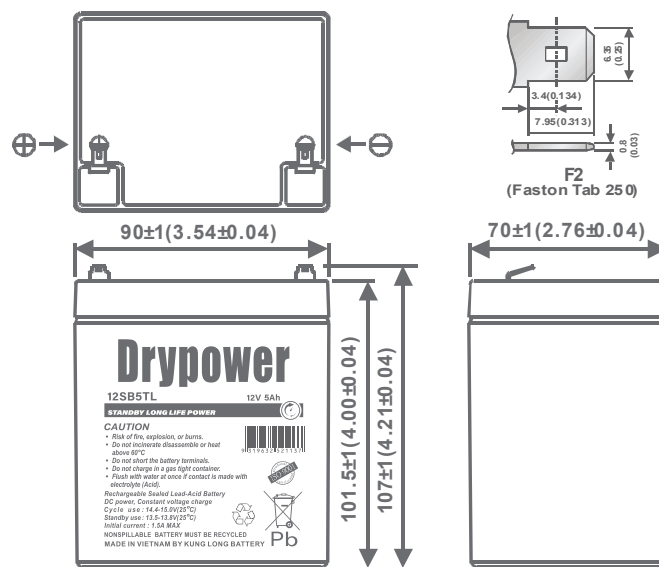


(V) Discharge Time VS. Discharge Current (25°C)

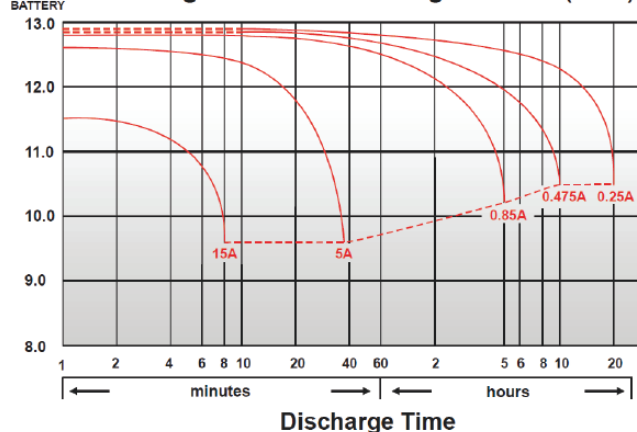


* If charging above 40°C, always use temperature-compensated charging (refer charge methods above). High temperature use accelerates ageing; as a general guide, service life halves for every 10°C sustained rise above 25°C. Consult the engineers at MI for more information if required.

CHARACTERISTICS CHARTS


Effect of Temperature on Capacity 25°C(77°F)

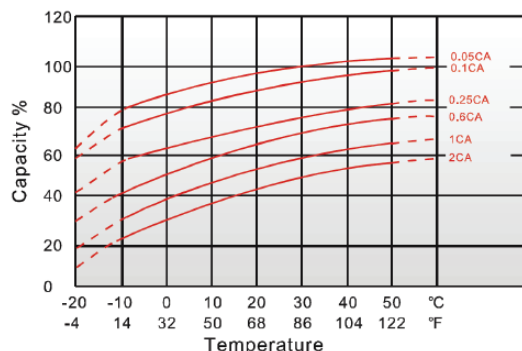

Trickle (or float) Service Life

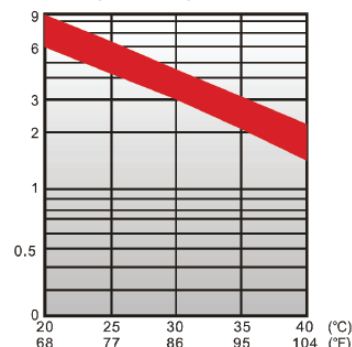

Capacity Retention Characteristic

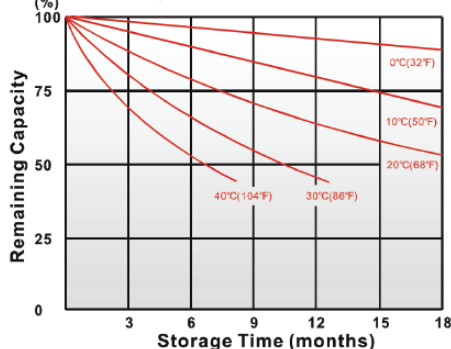

FEATURES & BENEFITS

- ◆ Industry leading 99.99% pure lead content for superior service life and dependable performance.
- ◆ Long service life to reduce maintenance and logistical costs across telecom, utilities and off-grid applications.
- ◆ Minimises sulphation with a thicker plate design and higher percentage of tin content to maximise battery standby life.
- ◆ High rate discharge capable to ensure reliable performance.
- ◆ Maintenance free technology and non-spillable design.
- ◆ Manufactured by Kung Long Battery (KLB) at facilities in Taiwan and Vietnam. KLB is a leading manufacturer and complies with relevant international quality standards including ISO9001, CE ETL9000, UL1989, OHSAS18001 and ISO17025. KLB supports Green Sustainable supply chain practices.



PERFORMANCE DATA

Discharge Rates in Watts to Various End Voltages at 25°C (77°F)

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
Time								
5	min	36.3	39.5	41.5	43.5	44.3	45.5	47.0
10	min	25.7	27.7	29.2	30.2	30.7	31.3	32.3
15	min	19.7	21.2	21.8	22.5	22.8	23.2	23.7
30	min	11.2	11.7	12.1	12.5	12.7	12.8	12.9
60	min	5.95	6.27	6.47	6.7	6.82	6.93	7.07
120	min	3.13	3.38	3.53	3.65	3.72	3.8	3.92
180	min	2.53	2.72	2.85	2.97	3.02	3.07	3.15
240	min	2.02	2.15	2.27	2.33	2.37	2.4	2.45
300	min	1.73	1.87	1.95	1.98	2.00	2.02	2.05
600	min	1.01	1.09	1.15	1.17	1.18	1.19	1.21
1200	min	0.53	0.572	0.603	0.615	0.62	0.625	0.633

Discharge Rates in Amperes to Various End Voltages at 25°C (77°F)

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
Time								
5	min	17.8	21.7	23.9	25.8	26.4	27	27.8
10	min	13.2	14.8	15.7	16.2	16.6	16.9	17.3
15	min	9.92	10.5	10.9	11.1	11.2	11.3	11.5
30	min	5.84	6.15	6.26	6.38	6.42	6.47	6.55
60	min	3.04	3.2	3.38	3.46	3.49	3.53	3.59
120	min	1.58	1.7	1.79	1.87	1.91	1.94	1.99
180	min	1.27	1.35	1.41	1.47	1.49	1.52	1.55
240	min	1.00	1.07	1.11	1.15	1.16	1.18	1.21
300	min	0.851	0.898	0.919	0.942	0.953	0.962	0.978
600	min	0.497	0.506	0.514	0.521	0.524	0.529	0.535
1200	min	0.268	0.274	0.279	0.284	0.286	0.287	0.291

All data on the spec. sheet is an average value:

The tolerance range : X < 6min (+15%~-15%), 6min ≤ X < 10min (+12%~-12%), 10min ≤ X < 60min (+8%~-8%), X ≥ 60min (+5%~-5%)

Sep2026

Performance may vary depending on application. All specifications are correct at time of creation. All specifications and operation conditions contained in this datasheet are subject to change or improvement without prior notice to the user. This data is for evaluation purposes only. No guarantee is intended or implied by this data. For clarification and updated information, please contact us.